EUROPEAN PATENT OFFICE

Patent Abstracts of Japan

PUBLICATION NUMBER

05300351

PUBLICATION DATE

12-11-93

APPLICATION DATE

21-04-92

APPLICATION NUMBER

04100986

APPLICANT: MURATA MACH LTD;

INVENTOR: MORI SHUJI;


INT.CL.

: H04N 1/32 G08B 21/00 H04M 1/66

H04N 1/21

TITLE

: FACSIMILE EQUIPMENT

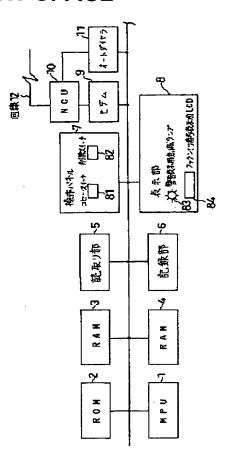

ABSTRACT: PURPOSE: To avoid useless use of recording paper by rejecting the reception from an opposite station to which no communication is desired and obtaining only reception data truly required.

> CONSTITUTION: An MPU 1 of this facsimile equipment controls the facsimile equipment based on a control program stored in a ROM 2, and when reception data including a TSI are stored in RAMs 3, 4 via an NCU 10 and a modem 9 from a line, the TSI is compared with a TSI stored in advance and when they are coincident, the data are printed out from a recording section 6 and when dissident, a display section 8 is used to display warning information and identification information and deletion or print of the reception data is selected by using a deletion switch 82 or a copy switch 81.

COPYRIGHT: (C)1993,JPO&Japio

(19)日本国特許庁 (JP)

(12) 公開特許公報(A)

(11)特許出頗公開番号

特開平5-300351

(43)公開日 平成5年(1993)11月12日

(51)Int.CL ⁵		識別記号	庁内整理番号	F I		技	南表示首所
H04N	1/32	С	2109-5C				
G08B	21/00	Α	7319—5G				
H 0 4 M	1/66	¢	9077-5K				
H04N	1/21		9070-5C				
				etr	هه ت	 	A =

審査請求 未請求 請求項の数1(全 5 頁)

• • •
4.4
計 地
村田

(54)【発明の名称】 ファクシミリ装置

(57)【要約】

【目的】 本発明のファクシミリ装置において、交信を 望まない相手局に対して受信を起否し、本当に必要な受 信データだけを得る事により記録紙の無駄な使用を避け る事を目的とする。

【構成】 本発明のファクシミリ装置において、MPUはROMに格納された制御プログラムに基さ、ファクシミリ装置の制御を行い、TS!を含む受信データが回線からNCU、モデムを介してRAMに記憶されると、予め記憶されているTS!と比較して一致すれば記録部から印字し、一致しなければ表示部で警告情報と識別情報を表示し、削除スイッチとコピースイッチの使用で受信データの削除と印字を選択する。

